


### Pump Details

- Magnetic Coupled External Gear Pump
- Non-Pulsing Flow
- Positive Displacement
- Accurate
- Leak Free
- Chemical Resistant
- Long Life



### Applications

Tuthill Pump Group specializes in OEM applications. All pumps have a wide range of options. Consult factory for other options and performance requirements. Laboratory Equipment, Water Purification, Heat Transfer, Lubrication, Water Treatment, Lubrication, Fluid Transfer, Recirculation, Cooling, Chemical Metering, Fluid Sampling, Temperature Control, Additive Delivery, Proportioning, Chemical Handling, Refrigerant, Liquid Chromatography, Laser, Oil Filtration, Oil Filtration, Acids, Heat Transfer, X-Ray Equipment, etc.

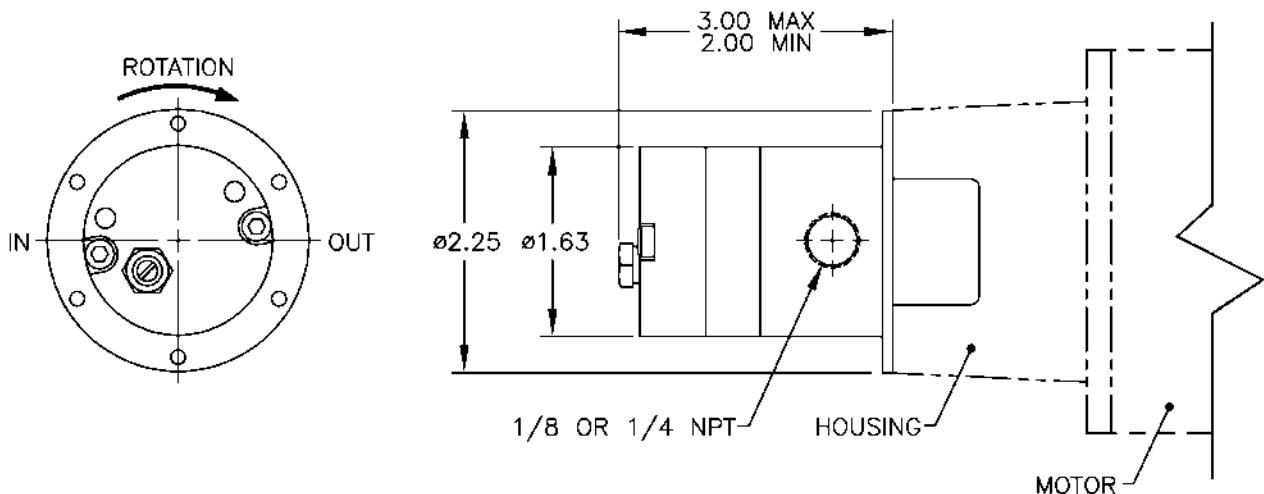

### General Specifications

<b>Flow Rates</b>	< 1 to 121 GPH (< 4 to 458 LPH)	<b>Metal Wetted Parts</b>	316 Stainless Steel, Titanium, or Hastelloy C276
<b>Temperatures</b>	-50 to 350°F (-46 to 176°C)	<b>Ports</b>	1/8 - 27 NPT or 1/4 - 18 NPT
<b>Differential Pressures</b>	250 PSI (17.2 bar)	<b>Speed</b>	5,000 RPM maximum
<b>System Pressures</b>	500 PSI (34.5 bar)	<b>Service Life</b>	Up to 20,000 hours + based on water
<b>Viscosity</b>	0.3 to 2000 cps +	<b>Suction Vacuum</b>	28.5 " Hg (724 mm Hg)
<b>Magnet Torque</b>	15 to 240 in-oz	<b>Self Priming</b>	Yes, wetted
<b>Magnet Materials</b>	Ceramic or Samarium Cobalt	<b>Size</b>	1.6" diameter pumphead

## Flow @ 3500 RPM


Model ml/rev	GPH @ 0 PSI	LPH @ 0 bar	GPH @ PSI Differential Pressure	LPH @ bar Differential Pressure	Continuous Duty Limit		Intermittent Duty Limit	
					PSI	bar	PSI	bar
.11	6	22	.2 @ 150	.75 @ 10.3	250	17.2	250	17.2
.19	10	38	.7 @ 250	2.6 @ 17.2	250	17.2	250	17.2
.23	12	46	2 @ 250	7 @ 17.2	250	17.2	250	17.2
.38	20	76	5 @ 250	19 @ 17.2	250	17.2	250	17.2
.57	30	114	9 @ 250	34 @ 17.2	250	17.2	250	17.2
.68	36	136	17 @ 250	64 @ 13.8	200	13.8	250	17.2
.80	42	160	21 @ 200	79 @ 13.8	200	13.8	250	17.2
.99	52	198	36 @ 140	136 @ 9.7	140	9.7	200	13.8
1.2	63	239	45 @ 140	170 @ 9.7	140	9.7	200	13.8
1.3	69	259	51 @ 125	193 @ 8.6	125	8.6	175	12.1
1.6	84	319	68 @ 100	257 @ 6.9	100	6.9	150	10.3
2.0	105	399	86 @ 100	325 @ 6.9	100	6.9	150	10.3
2.3	121	459	96 @ 100	363 @ 6.9	100	6.9	150	10.3

Performance Estimate Based on 68°F (20°C) Clean Deionized Water @ 1.0 centipoise fluid viscosity


## Materials of Construction

<b>Metal Wetted Parts</b>	316 Stainless Steel, Hastelloy C276, or Titanium
<b>Gears &amp; Bearings</b>	PPS (Polyphenylene Sulfide), PEEK (Polyetheretherketone), or PTFE
<b>O-Rings</b>	Viton or PTFE
<b>Ports</b>	1/8 NPT or 1/4 NPT
<b>Magnet Shrouds</b>	Ceramic Magnets (stronium ferrite) may be O-Ring seal shrouded; Samarium Cobalt Magnets are Metal Laser Welded
<b>Magnet Torque</b>	15 in/oz, 30 in/oz, 50 in/oz or 240 in/oz
<b>Bypass</b>	Full flow externally adjustable bypass option available
<b>Suction Vacuum</b>	Pumps self prime when wetted with operating fluid to 28.5 Hg" (724mm Hg). Dry lift not recommended. Fluid viscosity, temperature and pressure may affect the performance.
<b>Motors</b>	AC, DC, BLDC, Air, Variable Speed or Motor Mate Adapter Kits
<b>Operating Temperatures above 140 °F (60 °C)</b>	In the D Series Product line we offer special sizing option for operating at temperatures above 140 °F (60 °C). Consult factory for details.
<b>Gear &amp; Bearing Material Temperature Limit</b>	PPS limit is approximately 250 °F (121 °C) PEEK, Carbon and Metal limits are approximately 350 °F (176 °C) If possible, for temperatures above 250 °F (121 °C) Carbon bearings should be selected.


1750 RPM

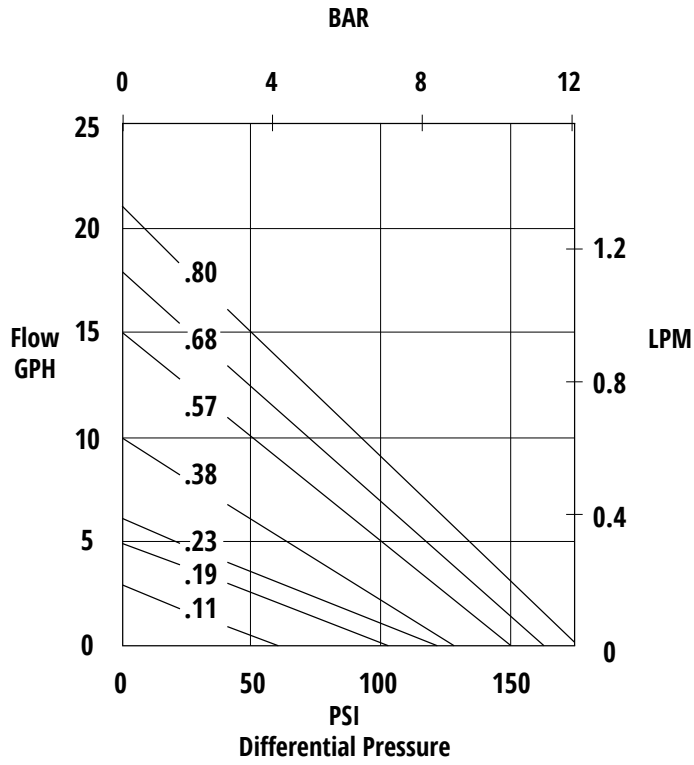

3500 RPM

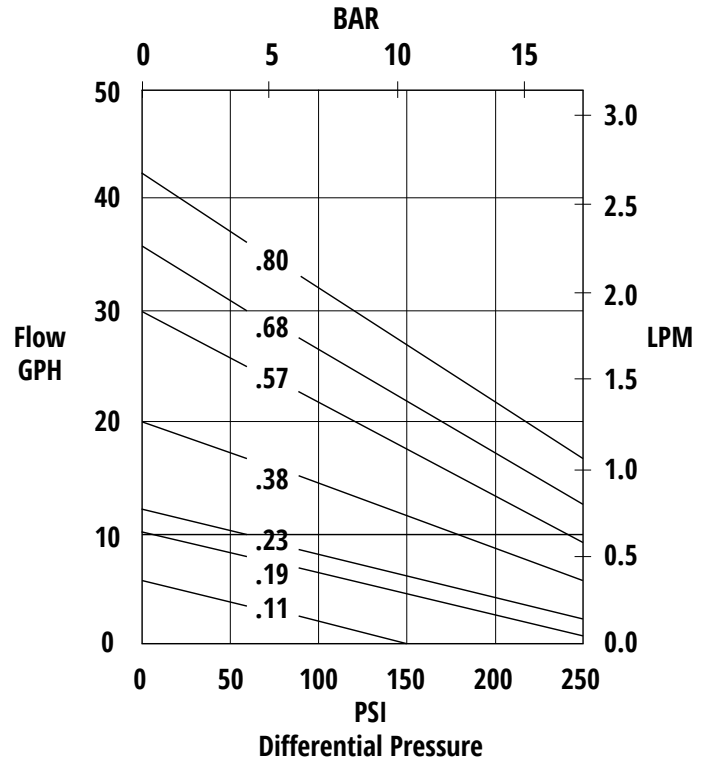

1750 RPM

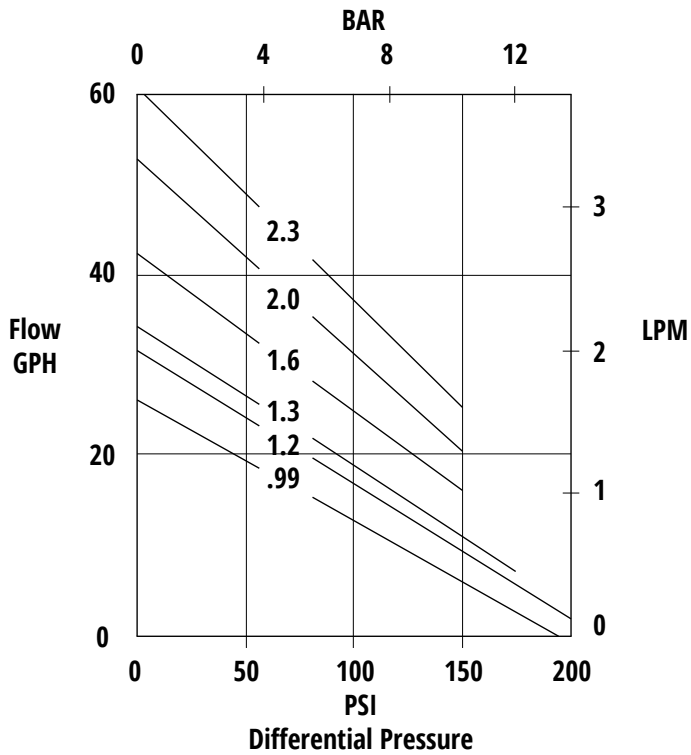

3500 RPM

